

### SPECIFICATIONS

#### Configurations

- Upflow / Horizontal
- Downflow

#### Heat Exchanger Design

- Aluminized steel primary heat exchanger with crimped non-welded construction
- AL 29-4C stainless steel secondary heat exchanger

#### Burner

- 11k BTUH burners and sealed burner box provide soft ignition and quiet operation

#### Cabinet Design

- Compact 33" height
- Standardized widths for easy coil fit

#### Air Delivery System

- Multi-speed high efficiency (constant torque) blower motor
- Easily removable slide-out blower design

#### Controls

- Single stage gas valve
- Self diagnostics save last 10 fault codes regardless of power interruption
- Durable silicon nitride igniter
- Electronic air cleaner and humidifier terminals

#### Venting

- Certified for direct vent and indirect (1 and 2 pipe applications)

#### Installation Features

- Left or right gas and utility connection
- Zero step horizontal conversion
- Removable floor base (upflow/horizontal units) for bottom return air

## GUH/GDD92C

### SINGLE STAGE CONSTANT TORQUE GAS FURNACE

**92% AFUE**



#### California Only


This furnace does not meet the South Coast Air Quality Management District (SCAQMD) Rule 1111 and San Joaquin Valley Air Pollution Control District (SJVAPCD) Rule 4905 NOx emission limit (14 ng/J) and cannot be installed within the SCAQMD or SJVAPCD and Bay Area.

Warranty—20 years on heat exchanger, 6 years on parts (Some limitations apply; see printed warranty for details.)

[www.century-hvac.com](http://www.century-hvac.com)



## MODEL NUMBER GUIDE

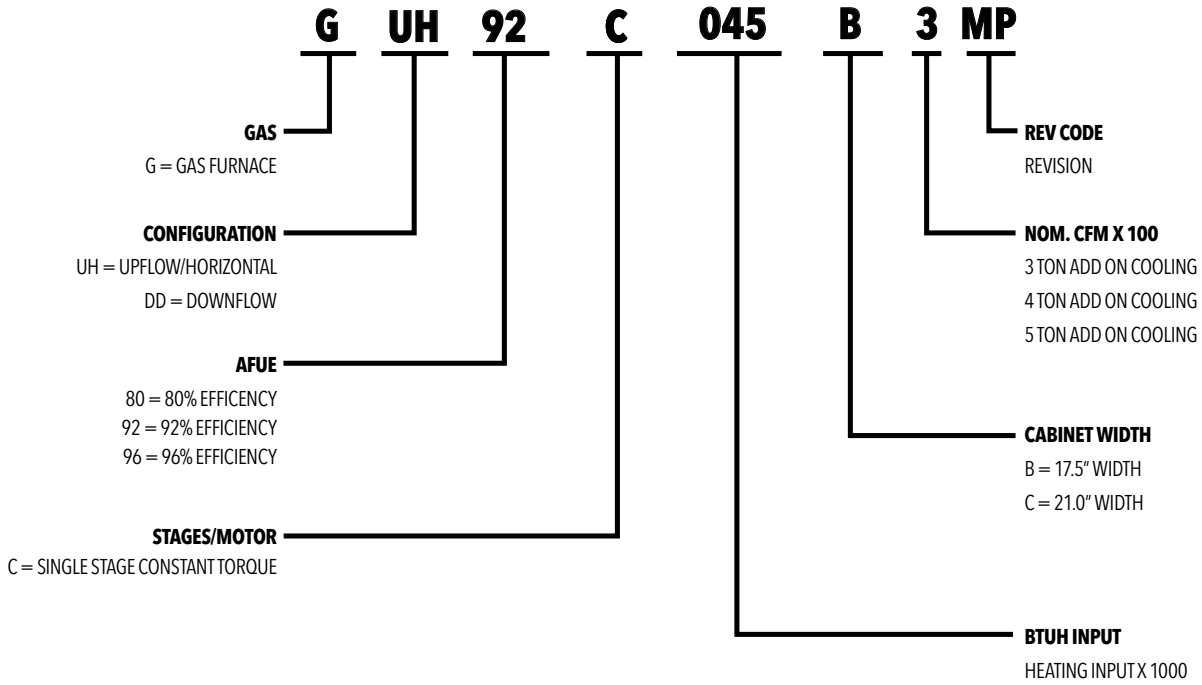

## PHYSICAL AND ELECTRICAL DATA

	Model	Input (Btuh)	Output * (Btuh)	AFUE (ICS)	Nominal * Cooling Capacity (tons)	Gas Inlet (in.)	Volts/Hz/Phase	Max. Time Delay Breaker or Fuse	Nominal F.L.A.	Trans. (V.A.)	Approx. Shipping Weight (lbs.)
UPFLOW / HORIZONTAL	GUH92C045B3MP	44,000	42,000	92.1%	1.5-3	1/2	120-60-1	15	6.8	40	121.5
	GUH92C070B3MP	66,000	63,000	92.1%	1.5-3	1/2	120-60-1	15	6.8	40	128.5
	GUH92C090C3MP	88,000	84,000	92.1%	1.5-3	1/2	120-60-1	15	6.8	40	145.0
	GUH92C090C4MP	88,000	84,000	92.1%	2.5-4	1/2	120-60-1	15	8.4	40	145.0
	GUH92C110C4MP	110,000	104,000	92.1%	2.5-4	1/2	120-60-1	15	8.4	40	157.0
	GUH92C110C5MP	110,000	105,000	92.1%	3-5	1/2	120-60-1	15	10.9	40	159.0
DOWNFLOW	GDD92C045B3MP	44,000	43,000	92.1%	1.5-3	1/2	120-60-1	15	6.8	40	123.5
	GDD92C070B3MP	66,000	63,000	92.1%	1.5-3	1/2	120-60-1	15	6.8	40	129.5
	GDD92C090C4MP	88,000	84,000	92.1%	2.5-4	1/2	120-60-1	15	8.4	40	152.0

Note: For vent length and clearances to combustibles, please reference installation instructions.

\* At fully capacity

## DIMENSIONS (IN.)

	Model	A	B	C	D
UPFLOW / HORIZONTAL	GUH92C045B3MP	17-1/2	16-3/8	16	9-5/16
	GUH92C070B3MP	17-1/2	16-3/8	16	9-5/16
	GUH92C090C3MP	21	19-7/8	19-1/2	11-5/16
	GUH92C090C4MP	21	19-7/8	19-1/2	11-5/16
	GUH92C110C4MP	21	19-7/8	19-1/2	11-5/16
	GUH92C110C5MP	21	19-7/8	19-1/2	11-5/16
DOWNFLOW	GDD92C045B3MP	17-1/2	16-3/8	16	15-1/2
	GDD92C070B3MP	17-1/2	16-3/8	16	15-1/2
	GDD92C090C4MP	21	19-7/8	19-1/2	19



## BLOWER PERFORMANCE DATA UPFLOW/HORIZONTAL

	Model	Motor Size (hp)	Blower Size	Heating Temp Rise (F°)	Blower Speed	Heating CFM @ .10" - .80" w.c.									
						0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
UPFLOW / HORIZONTAL	GUH92C045B3MP	1/2	10 x 8	25 - 55	High	1375	1347	1321	1294	1267	1241	1212	1185	1159	1132
					Med/High	1259	1227	1199	1171	1143	1114	1085	1056	1027	996
					Med	1115	1082	1048	1017	984	952	918	886	852	814
					Med/Low	889	850	811	773	731	689	646	604	562	520
					Low	732	689	641	592	544	496	445	386	345	309
	GUH92C070B3MP	1/2	10 x 8	40 - 70	High	1392	1367	1340	1313	1286	1259	1231	1202	1175	1147
					Med/High	1273	1245	1216	1188	1159	1129	1102	1073	1043	1012
					Med	1131	1101	1068	1035	1001	970	936	902	866	831
					Med/Low	905	867	828	788	747	705	665	626	588	549
					Low	748	704	659	607	559	514	468	422	372	322
	GUH92C090C3MP	1/2	10 x 8	50 - 80	High	1442	1413	1382	1356	1327	1301	1273	1240	1213	1184
					Med/High	1320	1289	1259	1231	1200	1170	1139	1108	1076	1044
					Med	1172	1138	1105	1072	1037	1002	967	931	891	851
					Med/Low	939	898	859	817	774	729	682	638	596	556
					Low	776	729	682	629	576	524	477	428	375	338
	GUH92C090C4MP	3/4	10 x 10	45 - 75	High	1686	1651	1615	1583	1550	1515	1479	1446	1407	1368
					Med/High	1477	1438	1399	1362	1324	1283	1240	1195	1150	1111
					Med	1356	1315	1273	1236	1194	1151	1103	1057	1012	977
					Med/Low	1275	1233	1189	1147	1101	1049	1000	957	916	881
					Low	1150	1103	1059	1009	958	903	857	816	773	726
	GUH92C110C4MP	3/4	10 x 10	50 - 80	High	1726	1696	1666	1634	1607	1569	1539	1507	1484	1445
					Med/High	1510	1476	1450	1375	1369	1336	1301	1262	1225	1190
					Med	1387	1356	1319	1282	1238	1202	1158	1112	1081	1031
					Med/Low	1303	1268	1231	1191	1154	1101	1066	1014	968	936
Low					1180	1140	1102	1055	1009	963	903	860	816	775	
GUH92C110C5MP	1	11 1/2 x 10	45 - 75	High	2082	2051	2018	1987	1953	1920	1887	1855	1824	1792	
				Med/High	1854	1818	1778	1742	1707	1671	1639	1606	1575	1541	
				Med	1679	1640	1602	1570	1532	1498	1463	1427	1390	1351	
				Med/Low	1577	1537	1498	1458	1419	1380	1342	1305	1265	1224	
				Low	1400	1356	1316	1273	1228	1185	1142	1095	1040	989	
DOWNFLOW	GDD92C045B3MP	1/2	10 x 8	25 - 55	High	1376	1349	1324	1295	1272	1253	1226	1202	1177	1146
					Med/High	1247	1223	1199	1172	1143	1121	1096	1074	1041	1014
					Med	1101	1074	1048	1018	992	961	932	898	876	833
					Med/Low	918	890	854	824	786	764	704	688	659	634
					Low	744	712	672	631	596	528	517	466	436	392
	GDD92C070B3MP	1/2	10 x 8	40 - 70	High	1413	1384	1365	1340	1318	1291	1274	1243	1226	1199
					Med/High	1283	1264	1241	1212	1185	1166	1143	1099	1077	1056
					Med	1132	1109	1078	1051	1024	995	963	925	909	874
					Med/Low	908	882	852	802	771	732	716	650	635	578
					Low	756	708	676	648	574	524	479	452	407	299
	GDD92C090C4MP	3/4	10 x 10	45 - 75	High	1701	1673	1640	1611	1586	1542	1519	1485	1468	1417
					Med/High	1477	1444	1430	1370	1351	1313	1289	1255	1225	1184
					Med	1364	1335	1299	1266	1230	1185	1156	1122	1071	1075
					Med/Low	1289	1255	1215	1178	1147	1088	1057	1007	964	924
					Low	1158	1123	1085	1035	1003	957	908	878	788	784

### ACCESSORY LIST


Catalog Number	Description
<b>External Filter Rack kits</b>	
1.841018	1 Pack (16x25)
1.841039	10 Pack (16x25)
<b>Natural to LP Kits</b>	
11K50	1-Stage GUH/GDD92C
11K45	High Altitude 1-Stage >7500'
17H62	1-Stage - 90% - For O30 Capacity Only
17H90	High Altitude > 7500 ft - For O30 Capacity Only
<b>Return Air Base</b>	
68W62	17.5", B Width
68W63	21.0", C Width
<b>Downflow Combustible Flooring Base</b>	
11M60	17.5", B Width
11M61	21.0", C Width
<b>Horizontal Suspension Kits</b>	
51W10	80% & 90% Kit
<b>Flush Mount Termination (90% Furnaces only) US Only</b>	
51W11	2" & 3" Vent Version
<b>Concentric Vent Kit (90% Furnaces only) US Only</b>	
71M80	1-1/2" Vent Version
69M29	2" Vent Version
60L46	3" Vent Version
<b>2-Stage Compressor Kit</b>	
85W66	Blower Relay Kit
<b>Transformer (75VA)</b>	
27J32	Recommended when furnace is used with zoning or defrost thermostats and other 24V accessories requiring a higher VA rating
	Circuit breaker (furnished) is wired in series
	Replaces the standard 40VA transformer

**Note:** For vent sizing and clearances to combustibles, please reference installation instructions. 2-Stage Compressor Relay Kit 2-Stage Compressor Relay Kit


"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."

Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations. Third party incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.


**UPFLOW/HORIZONTAL TOP VIEW**




**DOWNFLOW TOP VIEW**




**RIGHT SIDE VIEW**

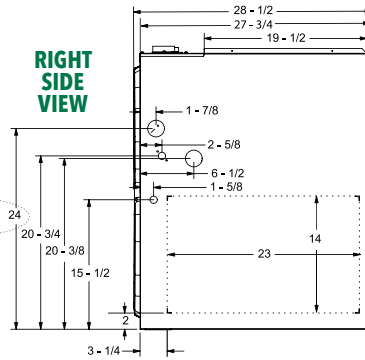


**RIGHT SIDE VIEW**

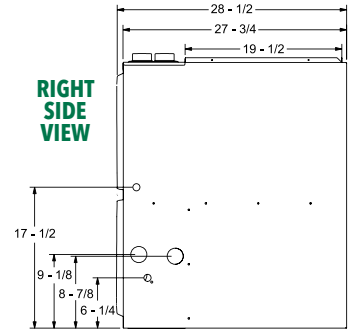

**BOTTOM VIEW**



**BOTTOM VIEW**



**FRONT VIEW**

