


# VMH-V Series

## Combinations Chart

### SINGLE/MULTI ZONE MINI-SPLITS

6,000 to 55,000 BTUH

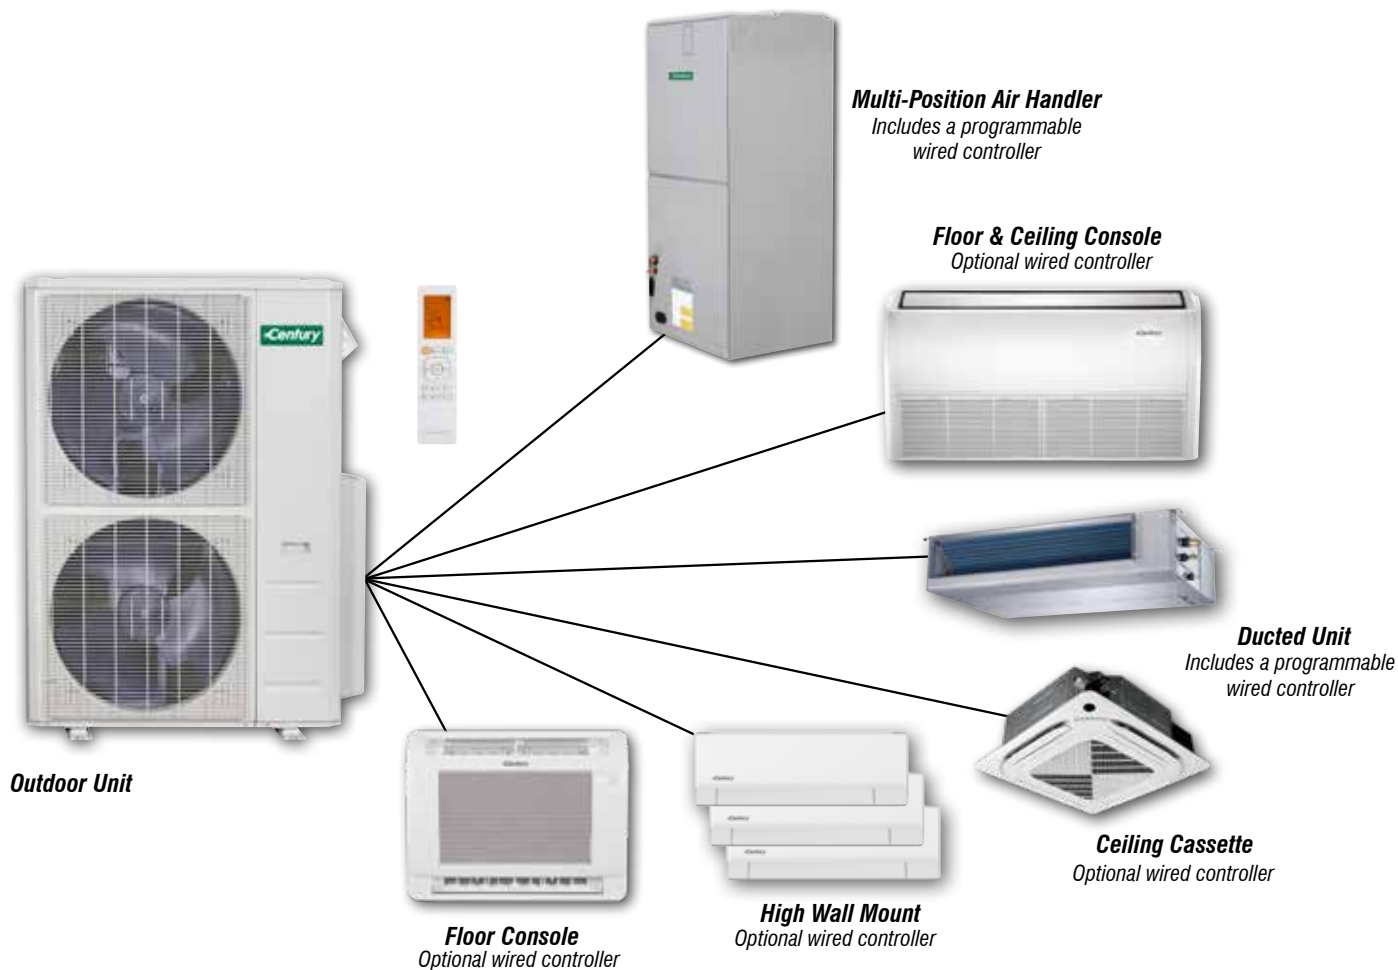

# MINI-SPLIT COMBINATIONS (INCLUDING AIR HANDLERS)

Due to the extensive potential combinations, not all possible matches can be shown. For those combinations not on this table, confirm that total capacity of all connected heads is **NOT** below 66% or above 133% of nominal outdoor unit capacity.

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH28TV-1 Max 3 Zones	Wall mounted: 6K/ 9K/12K/18K  Cassette: 6K/9K/12K/18K  Duct/Console: 9K/12K/18K  AHU: 18K	Wall mounted: 9+9+9  Duct: 9+9+9	6+18	24
			9+18	27
			12+18	30
			6+6+18	30
			6+9+18	33
			6+12+18	36
			9+9+18	36
			9+12+18	39
			A-VMH36QV-1/ A-VMH36QV-1A Max 4 Zones	Wall mounted: 6K/9K/12K/ 18K/24K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18/24K  Console: 12K/18K  AHU: 18K/24K
6+24	30			
9+18	27			
9+24	33			
12+18	30			
12+24	36			
18+18	36			
18+24	42			
24+24	48			
6+6+24	36			
6+9+18	33			
6+9+24	39			
6+12+18	36			
6+12+24	42			
9+9+18	36			
9+9+24	42			
9+12+18	39			
9+12+24	45			
12+12+18	42			
12+12+24	48			
6+6+6+18	36			
6+6+6+24	42			
6+6+9+18	39			
6+6+9+24	45			
6+6+12+18	42			
6+6+12+24	48			
6+9+9+18	45			
6+9+9+24	51			
6+9+12+18	48			
6+9+12+24	51			
6+12+12+18	48			
6+12+12+24	54			
9+9+9+18	45			
9+9+9+24	51			
9+9+12+12	42			
9+9+12+18	48			
9+9+12+24	54			
9+12+12+18	51			
12+12+12+18	54			

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/9K/12K/ 18K/24K/ 30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18/24K  Console: 12K/18K  AHU: 18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+18	24
			6+24	30
			6+30	36
			6+36	42
			9+18	24
			9+24	33
			9+30	39
			9+36	45
			12+18	30
			12+24	36
			12+30	42
			12+36	48
			18+18	36
			18+24	42
			18+30	48
			18+36	54
			24+24	48
			24+30	54
			24+36	60
			6+6+24	36
			6+9+18	33
			6+9+24	39
			6+12+18	36
			6+12+24	42
			9+9+18	36
			9+9+24	42
			9+9+18	36
			9+9+24	42
			9+12+18	39
			9+12+24	45
			12+12+18	42
			12+12+24	48
			6+6+30	42
6+12+30	48			
9+9+30	48			
9+12+30	52			
12+12+30	54			
6+6+36	48			
6+12+36	54			
9+9+36	54			
9+12+36	58			
6+6+6+18	36			
6+6+6+24	42			
6+6+9+18	39			
6+6+9+24	45			
6+6+12+18	42			
6+6+12+24	48			
6+9+9+18	42			
6+9+9+24	48			

NOTE: If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

# MINI-SPLIT COMBINATIONS (INCLUDING AIR HANDLERS)

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/9K/12K/ 18K/24K/ 30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18/24K  Console: 12K/18K  AHU: 18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+9+12+18	45
			6+9+12+24	51
			6+12+12+18	48
			6+12+12+24	54
			9+9+9+18	45
			9+9+9+24	51
			9+9+12+18	54
			9+9+12+24	54
			9+12+12+18	51
			9+12+12+24	56
			12+12+12+18	54
			12+12+12+24	60
			6+6+6+30	48
			6+6+9+30	51
			6+6+12+30	54
			6+9+9+30	54
			9+9+9+30	57
			9+9+9+30	57
			9+9+12+30	60
			9+12+12+30	60
			6+6+6+6+18	42
			6+6+6+6+24	48
			6+6+6+12+18	48
			6+6+6+12+24	54
			6+9+9+9+18	51
			6+9+9+9+24	57
			6+9+9+12+18	54
			6+9+9+12+24	60
			6+9+12+12+18	57
			6+9+12+12+24	63
6+12+12+12+18	60			
9+9+9+9+18	36			
9+9+9+9+24	60			
9+9+9+12+24	63			
9+9+9+12+18	57			
9+9+12+12+18	60			
9+12+12+12+18	64			
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/9K/12K/ 18K/24K/ 30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18/24K  Console: 12K/18K  AHU: 18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+18	24
			6+24	30
			9+18	27
			9+24	33
			12+18	30
			12+24	36
			18+18	36
			18+24	42
24+24	48			

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/9K/12K/ 18K/24K/ 30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18/24K  Console: 12K/18K  AHU: 18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+6+18	30
			6+6+24	36
			6+9+18	33
			6+9+24	39
			6+12+18	36
			6+12+24	42
			9+9+18	36
			9+9+24	42
			9+12+18	39
			9+12+24	45
			12+12+18	42
			12+12+24	48
			6+6+6+18	36
			6+6+6+24	42
			6+6+9+18	39
			6+6+9+24	45
			6+6+12+18	42
			6+6+12+24	48
			6+9+9+18	42
			6+9+9+24	48
			6+9+12+18	45
			6+9+12+24	51
			6+6+6+6+18	42
			6+6+6+6+24	48
			6+6+6+12+18	48
			6+6+6+12+24	54
			6+9+9+9+18	51
			6+9+9+9+24	57
			6+9+9+12+18	54
			6+9+9+12+24	60
6+9+12+12+18	57			
6+9+12+12+24	63			
6+12+12+12+18	60			
9+9+9+9+18	54			
9+9+9+9+24	60			
9+9+9+12+24	63			
9+9+9+12+18	57			
9+9+12+12+18	60			
9+12+12+12+18	63			

NOTE: If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

# MINI-SPLIT COMBINATIONS

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE					Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)		Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU				Indoor Units	Total BTHU
A-VMH18DV-1 Max 2 Zones	Wall mounted: 6K/ 9K/12K  Cassette: 6K/9K/12K  Duct/Console: 9K/12K	Wall mounted: 9+9  Duct: 9+9	6+6	12	A-VMH36QV-1/ A-VMH36QV-1A Max 4 Zones	Wall mounted: 6K/ 9K/12K/24K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9  Duct: 9+9+9+9	6+18	24
			6+9	15				6+24	30
			6+12	18				9+18	27
			6+18	24				9+24	33
			9+9	18				12+12	24
			9+12	21				12+18	30
			9+18	27				12+24	36
			12+12	24				18+18	36
			12+18	30				18+24	42
			18+18	36				24+24	48
A-VMH28TV-1 Max 3 Zones	Wall mounted: 6K/ 9K/12K/18K  Cassette: 6K/9K/12K/18K  Duct/Console: 9K/12K/18K	Wall mounted: 9+9+9  Duct: 9+9+9	6+9	15	6+6+24	36			
			6+12	18	6+9+12	27			
			6+18	24	6+9+18	33			
			6+24	30	6+9+24	39			
			9+9	18	6+12+18	36			
			9+12	18	6+12+24	42			
			9+18	27	6+18+18	42			
			9+24	33	6+18+24	48			
			12+12	24	6+24+24	54			
			12+18	30	9+9+9	27			
			12+24	36	9+9+12	30			
			18+18	36	9+9+18	36			
			6+6+6	18	9+9+24	42			
			6+6+9	21	9+12+12	36			
			6+6+12	24	9+12+18	45			
			6+6+18	30	9+12+24	45			
			6+6+24	36	9+18+18	45			
			6+9+9	24	9+18+24	51			
			6+9+12	27	9+24+24	57			
			6+9+18	33	12+12+12	36			
			6+9+24	39	12+12+18	42			
			6+12+12	30	12+12+24	48			
			6+12+18	36	12+18+18	48			
			6+12+24	42	12+18+24	54			
			6+18+18	42	12+24+24	60			
			6+18+24	48	18+18+18	54			
			9+9+9	27	18+18+24	60			
			9+9+12	30	6+6+6+18	36			
			9+9+18	36	6+6+6+24	42			
			9+9+24	42	6+6+9+12	33			
			9+12+12	33	6+6+9+18	48			
			9+12+18	45	6+6+9+24	45			
			9+12+24	45	6+6+12+12	36			
			9+18+18	45	6+6+12+18	42			
			12+12+12	36	6+6+12+24	48			
			12+12+18	42	6+6+18+18	48			
12+18+18	48	6+6+18+24	54						
12+12+24	48	6+9+9+9	33						
		6+9+9+12	36						
		6+9+9+18	48						
		6+9+9+24	48						

**Note:** If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

Rules: Outdoor unit Capacity\*0.66 <= Indoor unit total capacity <= Outdoor unit Capacity \*1.5

# MINI-SPLIT COMBINATIONS

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH36QV-1/ A-VMH36QV-1A Max 4 Zones	Wall mounted: 6K/ 9K/12K/24K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9  Duct: 9+9+9+9	6+9+12+12	39
			6+9+12+18	45
			6+9+12+24	51
			6+9+18+18	51
			6+9+18+24	57
			6+9+24+24	63
			6+12+12+12	42
			6+12+12+18	48
			6+12+12+24	54
			6+12+18+18	54
			6+12+18+24	60
			6+18+18+18	60
			9+9+9+9	36
			9+9+9+12	39
			9+9+9+18	45
			9+9+9+24	51
			9+9+12+12	42
			9+9+12+18	48
			9+9+12+24	54
			9+9+18+18	54
			9+9+18+24	60
			9+12+12+12	45
			9+12+12+18	51
			9+12+12+24	57
			9+12+18+18	57
			9+18+18+18	63
			12+12+12+12	48
			12+12+12+18	54
			12+12+12+24	60
			12+12+18+18	60
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	9+18	27
			9+24	33
			12+12	27
			12+18	30
			12+24	26
			18+18	36
			18+24	42
			24+24	48
			6+18	24
			6+24	30
			6+36	42
			9+36	45
			12+36	48
			18+36	54
			24+36	60
			6+30	36
			9+30	39
			12+30	42
			18+30	48
			24+30	54

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	30+30	60
			6+6+24	36
			6+9+12	27
			6+9+18	60
			6+9+24	39
			6+12+18	36
			6+12+24	42
			6+18+18	42
			6+18+24	42
			6+24+24	54
			9+9+9	27
			9+9+12	36
			9+9+18	36
			9+9+24	42
			9+12+12	33
			9+12+18	39
			9+12+24	45
			9+18+18	45
			9+18+24	51
			9+24+24	57
			12+12+12	36
			12+12+18	42
			12+12+24	48
			12+18+18	48
			12+18+24	54
			12+24+24	60
			18+18+18	54
			18+18+24	60
			6+6+30	42
			6+6+36	48
6+12+30	48			
6+12+36	54			
6+18+30	54			
6+18+36	60			
9+9+30	48			
9+9+36	54			
9+12+30	51			
9+12+36	57			
9+18+30	57			
9+18+36	63			
12+12+30	60			
12+12+36	60			
12+18+30	60			
6+6+6+18	36			
6+6+6+24	42			
6+6+9+12	33			
6+6+9+18	39			
6+6+9+24	45			
6+6+12+12	36			
6+6+12+18	42			

**Note:** If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

Rules: Outdoor unit Capacity\*0.66 <= Indoor unit total capacity <= Outdoor unit Capacity \*1.5

# MINI-SPLIT COMBINATIONS

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+6+12+24	48
			6+6+18+18	48
			6+6+18+24	54
			6+9+9+9	33
			6+9+9+12	36
			6+9+9+18	42
			6+9+9+24	48
			6+9+12+12	39
			6+9+12+18	45
			6+9+12+24	51
			6+9+18+18	51
			6+9+18+24	57
			6+9+24+24	63
			6+12+12+12	42
			6+12+12+18	48
			6+12+12+24	54
			6+12+18+18	54
			6+12+18+24	60
			6+18+18+18	60
			9+9+9+9	36
			9+9+9+12	34
			9+9+9+18	54
			9+9+9+24	51
			9+9+12+12	42
			9+9+12+18	48
			9+9+12+24	54
			9+9+18+18	54
			9+9+18+24	60
			9+12+12+12	45
			9+12+12+18	51
			9+12+12+24	57
			9+12+18+18	57
			9+18+18+18	63
			12+12+12+12	48
			12+12+12+18	54
			12+12+12+24	60
			12+12+18+18	60
			6+6+6+30	48
			6+6+9+30	51
			6+6+12+30	54
6+9+9+30	54			
9+9+9+30	57			
9+9+9+30	57			
9+9+12+30	60			
6+6+6+36	54			
6+6+9+36	57			
6+6+12+36	60			
6+9+9+36	60			
9+9+9+36	63			
6+6+6+6+6	30			

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE							
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)				
			Indoor Units	Total BTHU			
A-VMH48PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K  Duct: 9K/12K/18K/24K  Console: 12K/18K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+6+6+6+9	33			
			6+6+6+6+12	36			
			6+6+6+6+18	42			
			6+6+6+6+24	48			
			6+6+6+9+12	39			
			6+6+6+12+12	42			
			6+6+6+12+18	48			
			6+6+6+12+24	54			
			6+6+6+18+18	54			
			6+6+6+18+24	60			
			6+9+9+9+9	42			
			6+9+9+9+12	45			
			6+9+9+9+18	51			
			6+9+9+9+24	57			
			6+9+9+12+12	48			
			6+9+9+12+18	54			
			6+9+9+12+24	60			
			6+9+9+18+18	60			
			6+9+12+12+12	57			
			6+9+12+12+18	57			
			6+9+12+12+24	63			
			6+9+12+18+18	63			
			6+12+12+12+12	54			
			6+12+12+12+18	60			
			9+9+9+9+9	45			
			9+9+9+9+12	48			
			9+9+9+9+18	54			
			9+9+9+9+24	60			
			9+9+9+12+12	51			
			9+9+9+12+18	57			
			9+9+9+18+18	63			
			9+9+12+12+12	54			
			9+9+12+12+18	60			
			9+12+12+12+12	57			
			9+12+12+12+18	63			
			12+12+12+12+12	60			
			A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K/24K  Duct: 6K/9K/12K/18K/24K  Console: 6K/9K/12K/18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+24	30
						6+30	36
						6+36	42
						9+18	27
9+24	33						
9+30	39						
9+36	45						
12+12	24						
12+18	30						
12+24	36						
12+30	32						
12+36	48						
18+18	36						
18+24	42						
18+30	48						

**Note:** If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

Rules: Outdoor unit Capacity\*0.66 <= Indoor unit total capacity <= Outdoor unit Capacity \*1.5

# MINI-SPLIT COMBINATIONS

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K/24K  Duct: 6K/9K/12K/18K/24K  Console: 6K/9K/12K/18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	18+36	54
			24+24	48
			24+30	54
			24+36	60
			30+30	60
			6+6+18	30
			6+6+24	36
			6+6+30	42
			6+6+36	48
			6+9+9	24
			6+9+12	27
			6+9+18	33
			6+9+24	39
			6+9+30	45
			6+9+36	51
			6+12+12	30
			6+12+18	36
			6+12+24	42
			6+12+30	48
			6+12+36	54
			6+18+18	42
			6+18+24	48
			6+18+30	54
			6+18+36	60
			6+24+24	54
			9+9+9	27
			9+9+12	30
			9+9+18	36
			9+9+24	42
			9+9+30	48
			9+9+36	54
			9+12+12	33
			9+12+18	39
			9+12+24	45
			9+12+30	51
			9+12+36	57
			12+12+12	36
			12+12+18	42
			12+12+24	48
			12+12+30	54
12+12+36	60			
12+18+18	48			
12+18+24	54			
12+18+30	60			
12+18+36	66			
12+24+24	60			
18+18+18	54			
18+18+24	60			
6+6+6+9	27			
6+6+6+12	30			
6+6+6+18	34			

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K/24K  Duct: 6K/9K/12K/18K/24K  Console: 6K/9K/12K/18K/24K	Wall mounted: 9+9+9+9+12	6+6+6+24	42
			6+6+6+30	48
			6+6+6+36	54
			6+6+9+9	30
			6+6+9+12	33
			6+6+9+18	39
			6+6+9+24	45
			6+6+9+30	51
			6+6+9+36	57
			6+6+12+12	36
			6+6+12+18	42
			6+6+12+24	48
			6+6+12+30	52
			6+6+12+36	58
			6+6+18+18	48
			6+6+18+24	52
			6+6+24+24	60
			6+9+9+9	33
			6+9+9+12	36
			6+9+9+18	42
			6+9+9+24	48
			6+9+9+30	54
			6+9+9+36	60
			6+9+12+12	39
			6+9+12+18	45
			6+9+12+24	51
			6+9+12+30	57
			6+9+12+36	63
			6+9+18+18	51
			6+9+18+24	57
			6+12+12+12	42
			6+12+12+18	48
			6+12+12+24	52
			6+12+12+30	58
			6+12+12+36	64
			6+12+18+18	54
			6+12+18+24	60
			6+18+18+18	60
			6+18+18+24	66
			9+9+9+9	36
9+9+9+12	39			
9+9+9+18	45			
9+9+9+24	51			
9+9+9+30	57			
9+9+9+36	63			
9+9+12+12	42			
9+9+12+18	48			
9+9+12+24	54			
9+9+12+30	60			
9+9+12+36	66			
9+9+18+18	54			

**Note:** If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.

**Rules:** Outdoor unit Capacity\*0.66 <= Indoor unit total capacity <= Outdoor unit Capacity \*1.5

# MINI-SPLIT COMBINATIONS

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K/24K  Duct: 6K/9K/12K/18K/24K  Console: 6K/9K/12K/18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	9+9+18+24	60
			9+9+24+24	66
			9+12+12+12	45
			9+12+12+18	51
			9+12+12+24	57
			9+12+12+30	63
			9+12+18+18	57
			9+12+18+24	63
			9+18+18+18	63
			12+12+12+12	48
			12+12+12+18	54
			12+12+12+24	60
			12+12+12+30	66
			12+12+12+36	72
			6+6+6+6+6	30
			6+6+6+6+9	33
			6+6+6+6+12	36
			6+6+6+6+18	42
			6+6+6+6+24	48
			6+6+6+6+30	54
			6+6+6+6+36	60
			6+6+6+9+9	36
			6+6+6+9+12	39
			6+6+6+9+18	45
			6+6+6+9+24	51
			6+6+6+9+30	57
			6+6+6+9+36	63
			6+6+6+12+12	42
			6+6+6+12+24	48
			6+6+6+12+30	54
			6+6+6+12+36	60
			6+6+6+18+18	54
			6+6+9+9+9	39
			6+6+9+9+12	42
			6+6+9+9+18	48
			6+6+9+9+24	54
			6+6+9+9+36	66
			6+6+9+12+12	45
			6+6+9+12+18	51
			6+6+9+12+24	57
6+6+9+12+30	63			
6+6+9+12+36	69			
6+6+9+18+18	57			
6+6+12+12+12	48			
6+6+12+12+18	54			
6+6+12+12+24	60			
6+6+12+12+30	66			
6+6+12+12+36	72			
6+9+9+9+9	42			
6+9+9+9+12	45			
6+9+9+9+18	51			

Hyper Heat MULTI INDOOR UNITS COMBINATION RULE				
Multi DC Outdoor Unit	Available Indoor	Standard Combination	Optional Combination(Only Run)	
			Indoor Units	Total BTHU
A-VMH55PV-1 Max 5 Zones	Wall mounted: 6K/ 9K/12K/24K/30K/36K  Cassette: 6K/9K/12K/18K/24K  Duct: 6K/9K/12K/18K/24K  Console: 6K/9K/12K/18K/24K	Wall mounted: 9+9+9+9+12  Duct: 9+9+9+9+12	6+9+9+9+24	57
			6+9+9+9+30	63
			6+9+9+9+36	69
			6+9+9+12+12	48
			6+9+9+12+18	54
			6+9+9+12+24	60
			6+9+9+12+30	66
			6+9+9+12+36	72
			6+9+9+18+18	60
			6+9+12+12+12	51
			6+9+12+12+18	57
			6+9+12+12+24	63
			6+9+12+12+30	69
			6+9+12+18+18	63
			6+12+12+12+12	54
			6+12+12+12+18	60
			6+12+12+12+24	66
			6+12+12+12+30	72
			9+9+9+9+9	45
			9+9+9+9+12	48
			9+9+9+9+18	54
			9+9+9+9+24	60
			9+9+9+9+30	66
			9+9+9+9+36	72
			9+9+9+12+12	51
			9+9+9+12+18	57
			9+9+9+12+24	63
			9+9+9+12+30	69
			9+9+12+12+12	54
			9+9+12+12+18	60
			9+9+12+12+24	66
			9+9+12+12+30	72
			9+9+18+18+18	72
			9+12+12+12+12	57
			9+12+12+12+18	63
			9+12+12+12+24	69
			9+12+12+18+18	69
			12+12+12+12+12	60
			12+12+12+12+18	66
			12+12+12+12+24	72
12+12+12+18+18	72			

**Note:** If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.  
 Rules: Outdoor unit Capacity\*0.66 <= Indoor unit total capacity <= Outdoor unit Capacity \*1.5