



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

## Submittal Data

MODEL

**PTAC15H150A-CY**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply 208/230V/60

#### Cooling

Capacity	Btu/h	14500/14700
Input	W	1370/1390
Rated current	A	7.5/8.9
EER	Btu/w	10.6

#### Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	W	4100/5000
Rated current	A	20.1/22.3
Max. Current	A	NA

#### Compressor Electrical

Model	KSM125N1UEZ	
Type	ROTARY	
Brand	GMCC	
Capacitor	mF	60
Refrigerant type	oz	R32/21.52

#### Air flow & Noise level


Indoor air flow	CFM	350/430
Indoor noise level	dB(A)	50.5/51
Outdoor noise level	dB(A)	65

#### Indoor Fan Motor

Model	ZKFP-25-8-157L	
Input	W	70
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	1020/1100

#### Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A

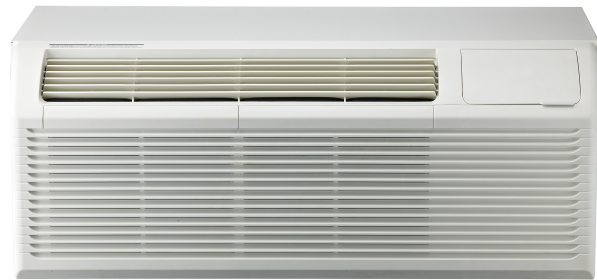

\*FRESH AIR\* (85 CFM)

#### Outdoor Fan Motor

Model	YKT-58-4-3L	
Input	W	87
Speed	RPM	1580

#### Dimensional Data


Dimension(W*H*D)	inch	42.01x15.98x20.94
Packing (W*H*D)	inch	44.49x19.29x24.61
Net/Gross weight	lbs.	105.82/114.64

#### System Data

Design pressure	300/580 PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

#### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

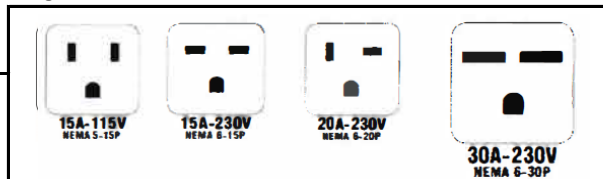

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535