

Air Handler Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION		
Dimension (W×D×H)	inch	14.52 x 21.00 x 23.58
	mm	445×533.4×599
Package (W×D×H)	inch	20.47 x 665 x 26.38
	mm	520×665×670
Net/Gross Weight	lbs	27/31
	kg	27/30.9

OUTDOOR SPECIFICATION		
Compressor Type	ROTARY	
Compressor Model	KTM240D46UKT2	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	620	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	1,825	
Outdoor Noise Level (dBA)	58	
Dimension (W×D×H)	inch	35.04 x 13.46 x 26.50
	mm	890×342×673
Package (W×D×H)	inch	39.17 x 13.46 x 29.13
	mm	995×342×740
Net/Gross Weight	lbs	98.33/105.60
	kg	44.6/47.9

EFFICIENCY			
Cooling		Heating	
SEER2	15.2	HSPF2-4	/
EER2	10.2	COP	/


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	29,000
Min/Max Capacity	8,200~31,000
Moisture Removal(L/h)	3.51
Standard Operating Range(*F°*C)	-13~122(-25~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	/
2. @ 47°F Min/Max Capacity	/
3. @ 17°F Rated	/
4. @ 5°F Rated: Capacity / COP	///
5. @ 5°F Max: Capacity	/
Standard Operating Range(*F°*C)	/(/)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL	
Indoor Power Supply	24V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	/
Indoor MOP	/
Outdoor Power Supply	208/230,60Hz,1Ph
Outdoor MCA	20
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	15
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	2,843(630 ~ 2,930)
System Power Input @ Heating (W)	/(/)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	/
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	164(50)
Max. Height Difference(ft/m)	98(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	81.13(2.30)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.7(65)
Connection Method	Flared

Indoor Unit Dimension

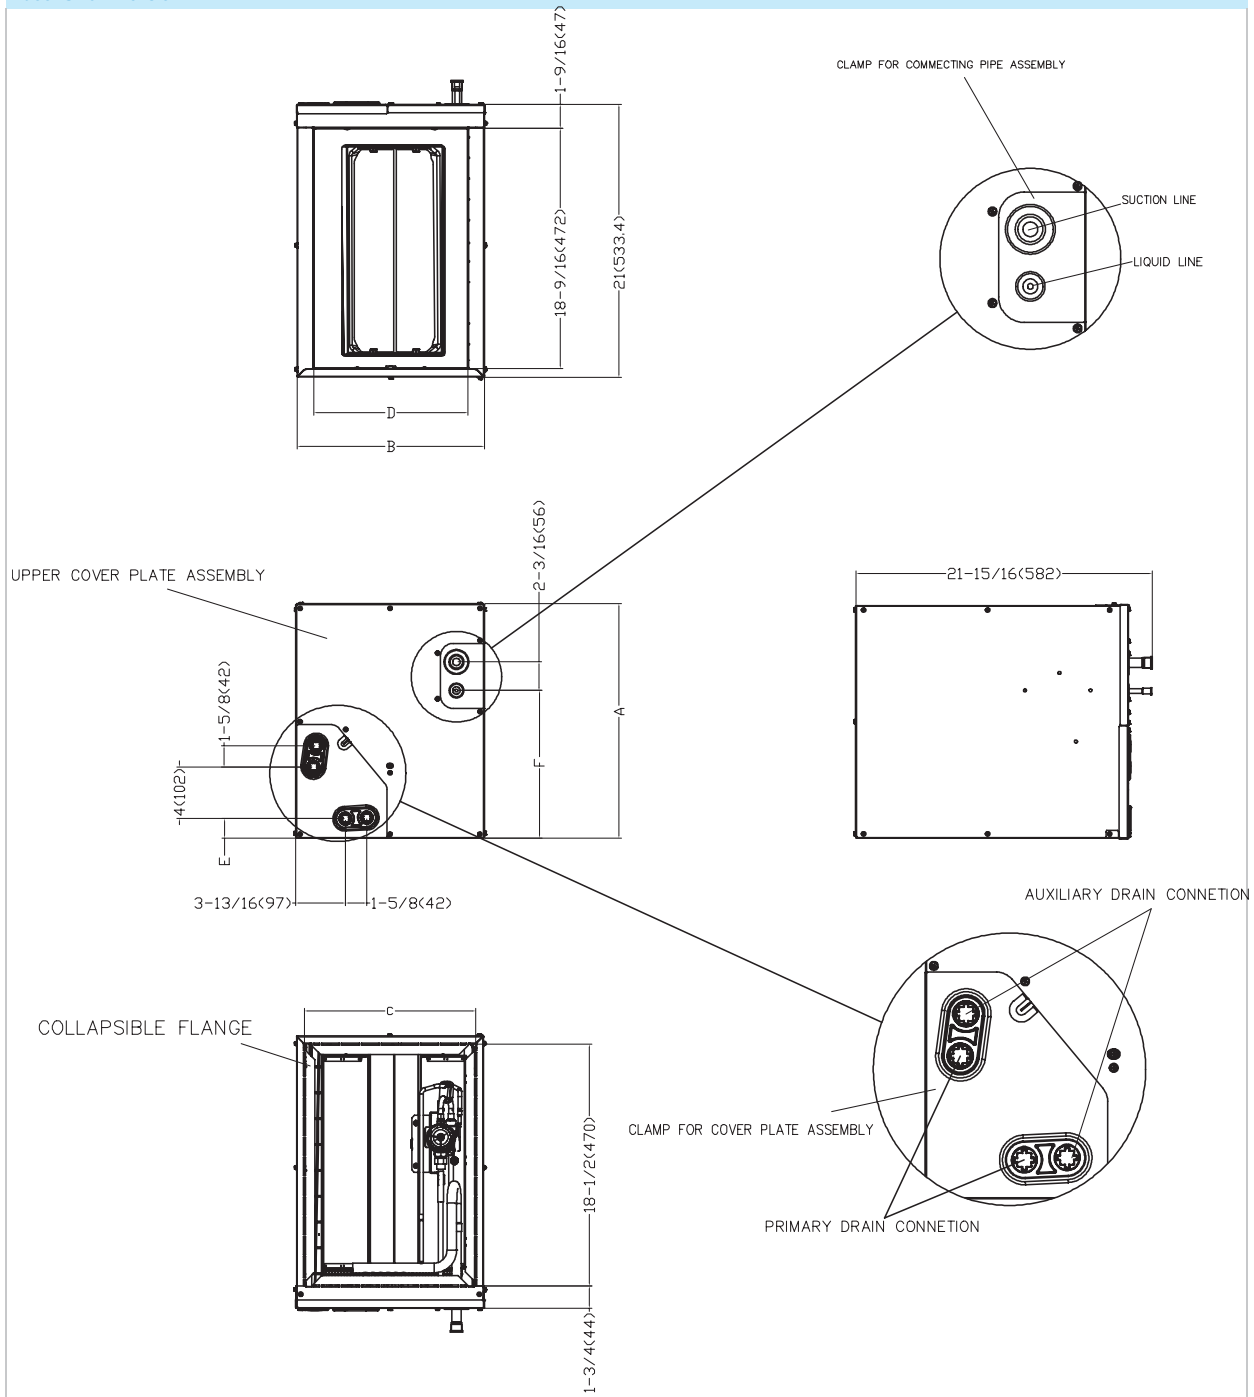


Model/Dimensions	MXP18/24B1A		MXP18/24A1A		MXP24/36A1A		MXP24/36B1A		MXP24/36C1A		MXP48/60C1A		MXP48/60D1A		
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	
<b>A</b>	<b>Model Height</b>	18	457	18	457	23-5/16	592	23-9/16	599	24	611	24	611	28	711
<b>B</b>	<b>Model Width</b>	17-1/2	445	14-1/2	368	14-1/2	368	17-1/2	445	21	534	21	534	24-1/2	622
<b>C</b>	<b>Supply Air Opening Width</b>	16-3/16	411	13-1/4	336	13-1/4	336	16-3/16	411	19-3/4	502	19-3/4	502	23-1/4	591
<b>D</b>	<b>Return Air Opening Width</b>	14-5/16	380	11-15/16	303	11-15/16	303	14-15/16	380	19-1/2	498	19-1/2	498	23-1/8	587
<b>E</b>	<b>Condensate Drains Height</b>	1-7/16	1-7/16	1-7/16	38	1-7/16	38	1-7/16	38	2-3/16	55	2-3/16	55	2-3/16	55
<b>F</b>	<b>Liquid Line Height</b>	11-3/8	290	11-3/8	290	17-5-16	455	16-3/8	417	17-1/2	445	17-1/2	445	21-7/16	545

Outdoor Unit Dimension

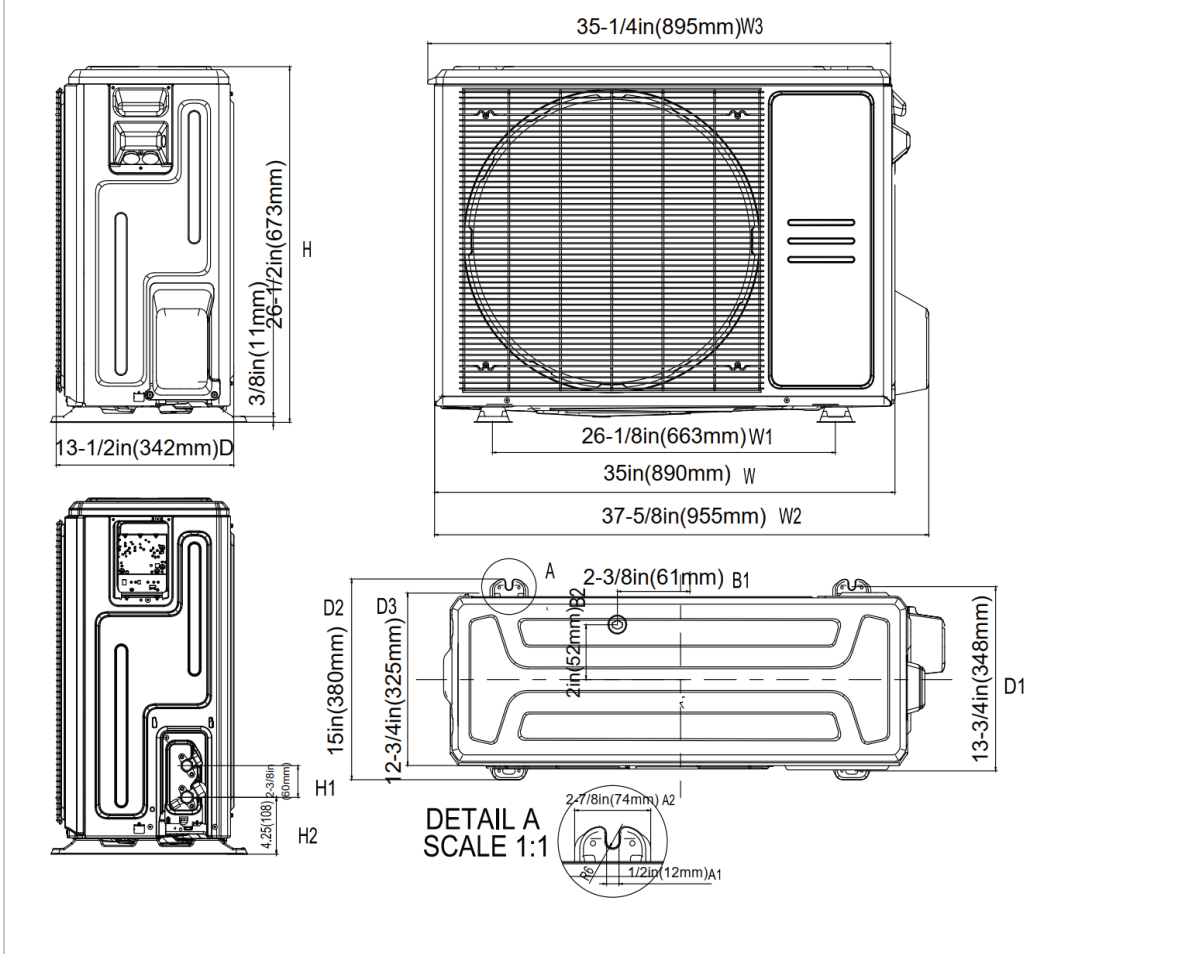

Installation Instruction For Outdoor Unit

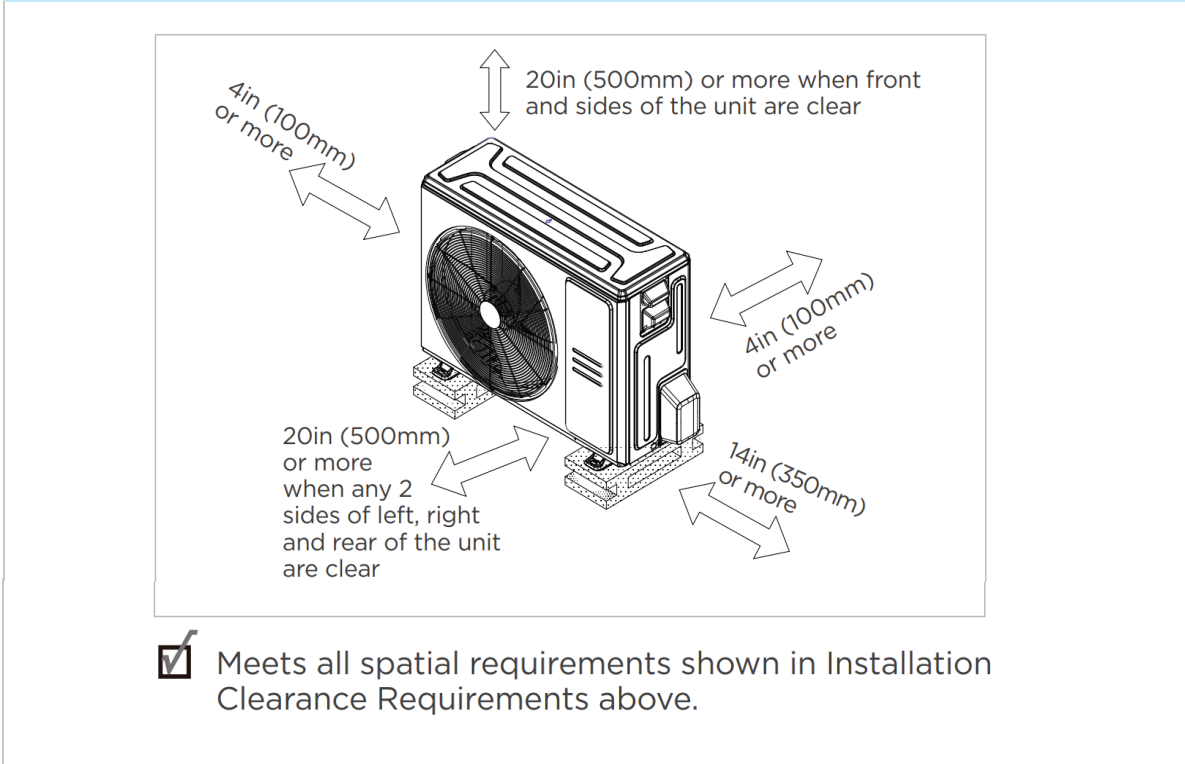

## Features

- Multi-position installation: horizontal(left or right), vertical( up or down)
- Aluminum Coil
- R454B refrigerant sensor
- Easy Maintenance
- Multiple control options available:
  - Two way communication wired controller with built-in WiFi:120N(X6W)
  - Third-Party 24V Thermostat